

NOTE:  
DIMENSIONS SHOWN ARE APPROXIMATE ONLY. THE CONTRACTOR SHALL VERIFY DIMENSIONS IN THE FIELD.






ALL WORK SHALL BE COMPLETED BY HAND IN THE PRESERVE. MECHANICAL EQUIPMENT OR TRUCKS CAN BE USED ONLY ON THE TRAIL.

APPROXIMATE QUANTITIES

- CUT = 12 CY
- FILL = 16 CY

GABION BASKETS 3' X 3' X 6' = 5 EACH. GABION ROCKS SHALL RANGE BETWEEN 4 TO 8 INCHES. SEE SPECS FOR INSTALLATION AND FILLING GUIDE.

- 1 FILL TO GRADE WITH DG. MATCH TO EXISTING WITH STABILIZER.
- 2 FILL TO GRADE WITH NATIVE AND SELECT BACKFILL MATERIAL.
- 3 INSTALL GABION BASKETS 3' X 3' X 6' CELLS.
- 4 CONSTRUCT CHANNEL PER DETAIL.
- 5 INSTALL GEOTEXTILE FABRIC (ENVIROSCAPE S2000 DOUBLE NET) ON SLOPE FACE AND SECURE IN PLACE (STAPLE BLANKET 1' O.C. PER SPECIFICATIONS). CUT AROUND PLANTINGS.

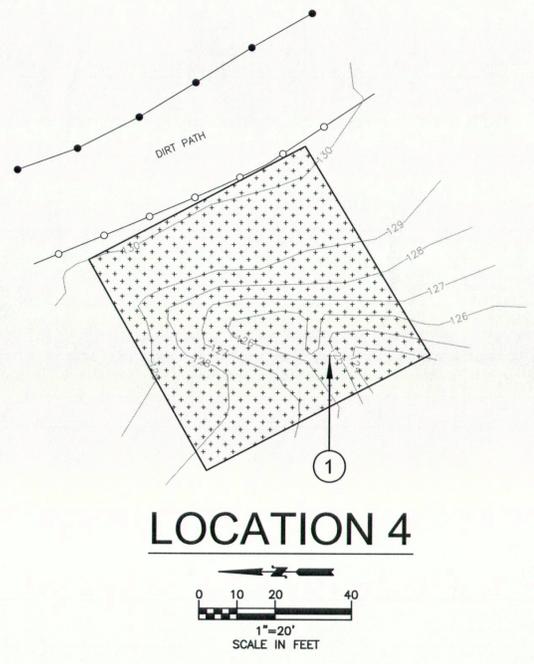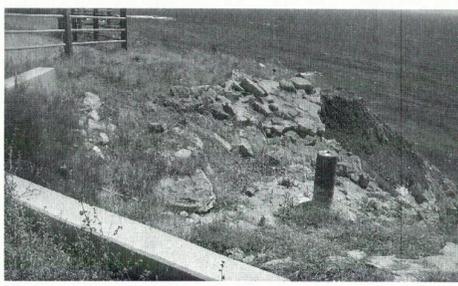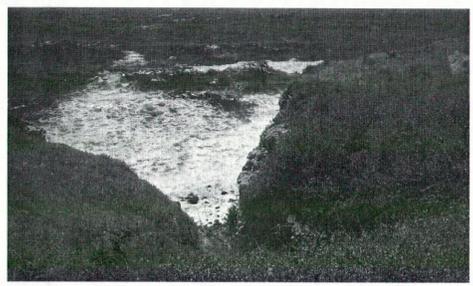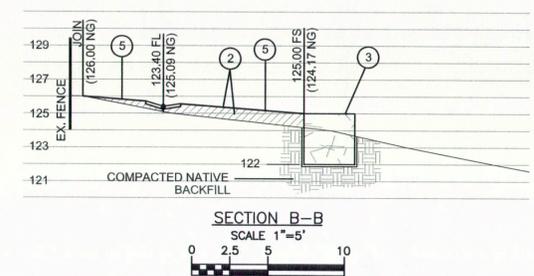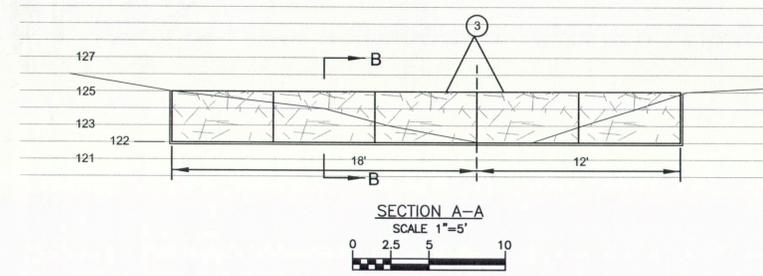

- 1 INSTALL GEOTEXTILE FABRIC (ENVIROSCAPE S2000 DOUBLE NET) ON SLOPE FACE AND SECURE IN PLACE (STAPLE BLANKET 1' O.C. PER SPECIFICATIONS). CUT AROUND PLANTINGS.

NOTE:  
DIMENSIONS SHOWN ARE APPROXIMATE ONLY. THE CONTRACTOR SHALL VERIFY DIMENSIONS IN THE FIELD.

ALL WORK SHALL BE COMPLETED BY HAND IN THE PRESERVE. MECHANICAL EQUIPMENT OR TRUCKS CAN BE USED ONLY ON THE TRAIL.

NO.	DATE	DESCRIPTION	APPROVED
REVISIONS			

DESIGNED CK  
DRAWN CK  
CHECKED CS  
DATE 10/11/12

PLANS PREPARED BY:  
**KOA CORPORATION**  
**CBM CONSULTING**

1411 W. 190TH ST., SUITE 525  
GARDENA, CA 90248  
Tel: (310) 329-0102  
Fax: (310) 329-1021  
cbm@koa.com

REGISTERED PROFESSIONAL ENGINEER  
No. 75345  
EXP. 6-30-14  
CIVIL ENGINEER  
STATE OF CALIFORNIA

CITY OF RANCHO PALOS VERDES



POINT VICENTE INTERPRETIVE CENTER  
AND SUB REGION ONE BLUFF TOP DRAINAGE CONTROL  
**LOCATIONS 3 & 4**