


GENERAL NOTES;

1. STANDARD SIZE PARKING SPACES, 9' x 18', HEAD IN PARKING.
2. 100 STALLS EAST HALF OF LOT.
3. 100 STALLS WEST HALF OF LOT.
4. INSTALL BOLLARDS PER DETAIL A, PAGE II, 3' ON CENTER.
5. REMOVE EXISTING CHAIN LINK FENCE, DISPOSE OFF-SITE.
6. ELECTRICAL CONDUITS SHALL BE BURIED 24" BELOW FINISH GRADE.
7. HANDHOLES SHALL BE 10" x 17" MINIMUM.
8. BOLLARD LIGHTS SHALL BE BIEBER "GEMINI 107" W/ CONCRETE FINISH.
9. PARKING LOT CONTROL SYSTEM INSTALLED BY OTHERS.
10. WEATHER PROOF ENCLOSURE SHALL BE LAMAX-MARK 3 (SEE DETAIL F).
11. 15 PICNIC TABLES TO BE FIELD LOCATED ADJACENT TO PARKING LOT; ENGINEER TO PROVIDE PRECISE LOCATIONS.
12. REMOVE EXISTING VEGETATION AT DIRECTION OF ENGINEER.

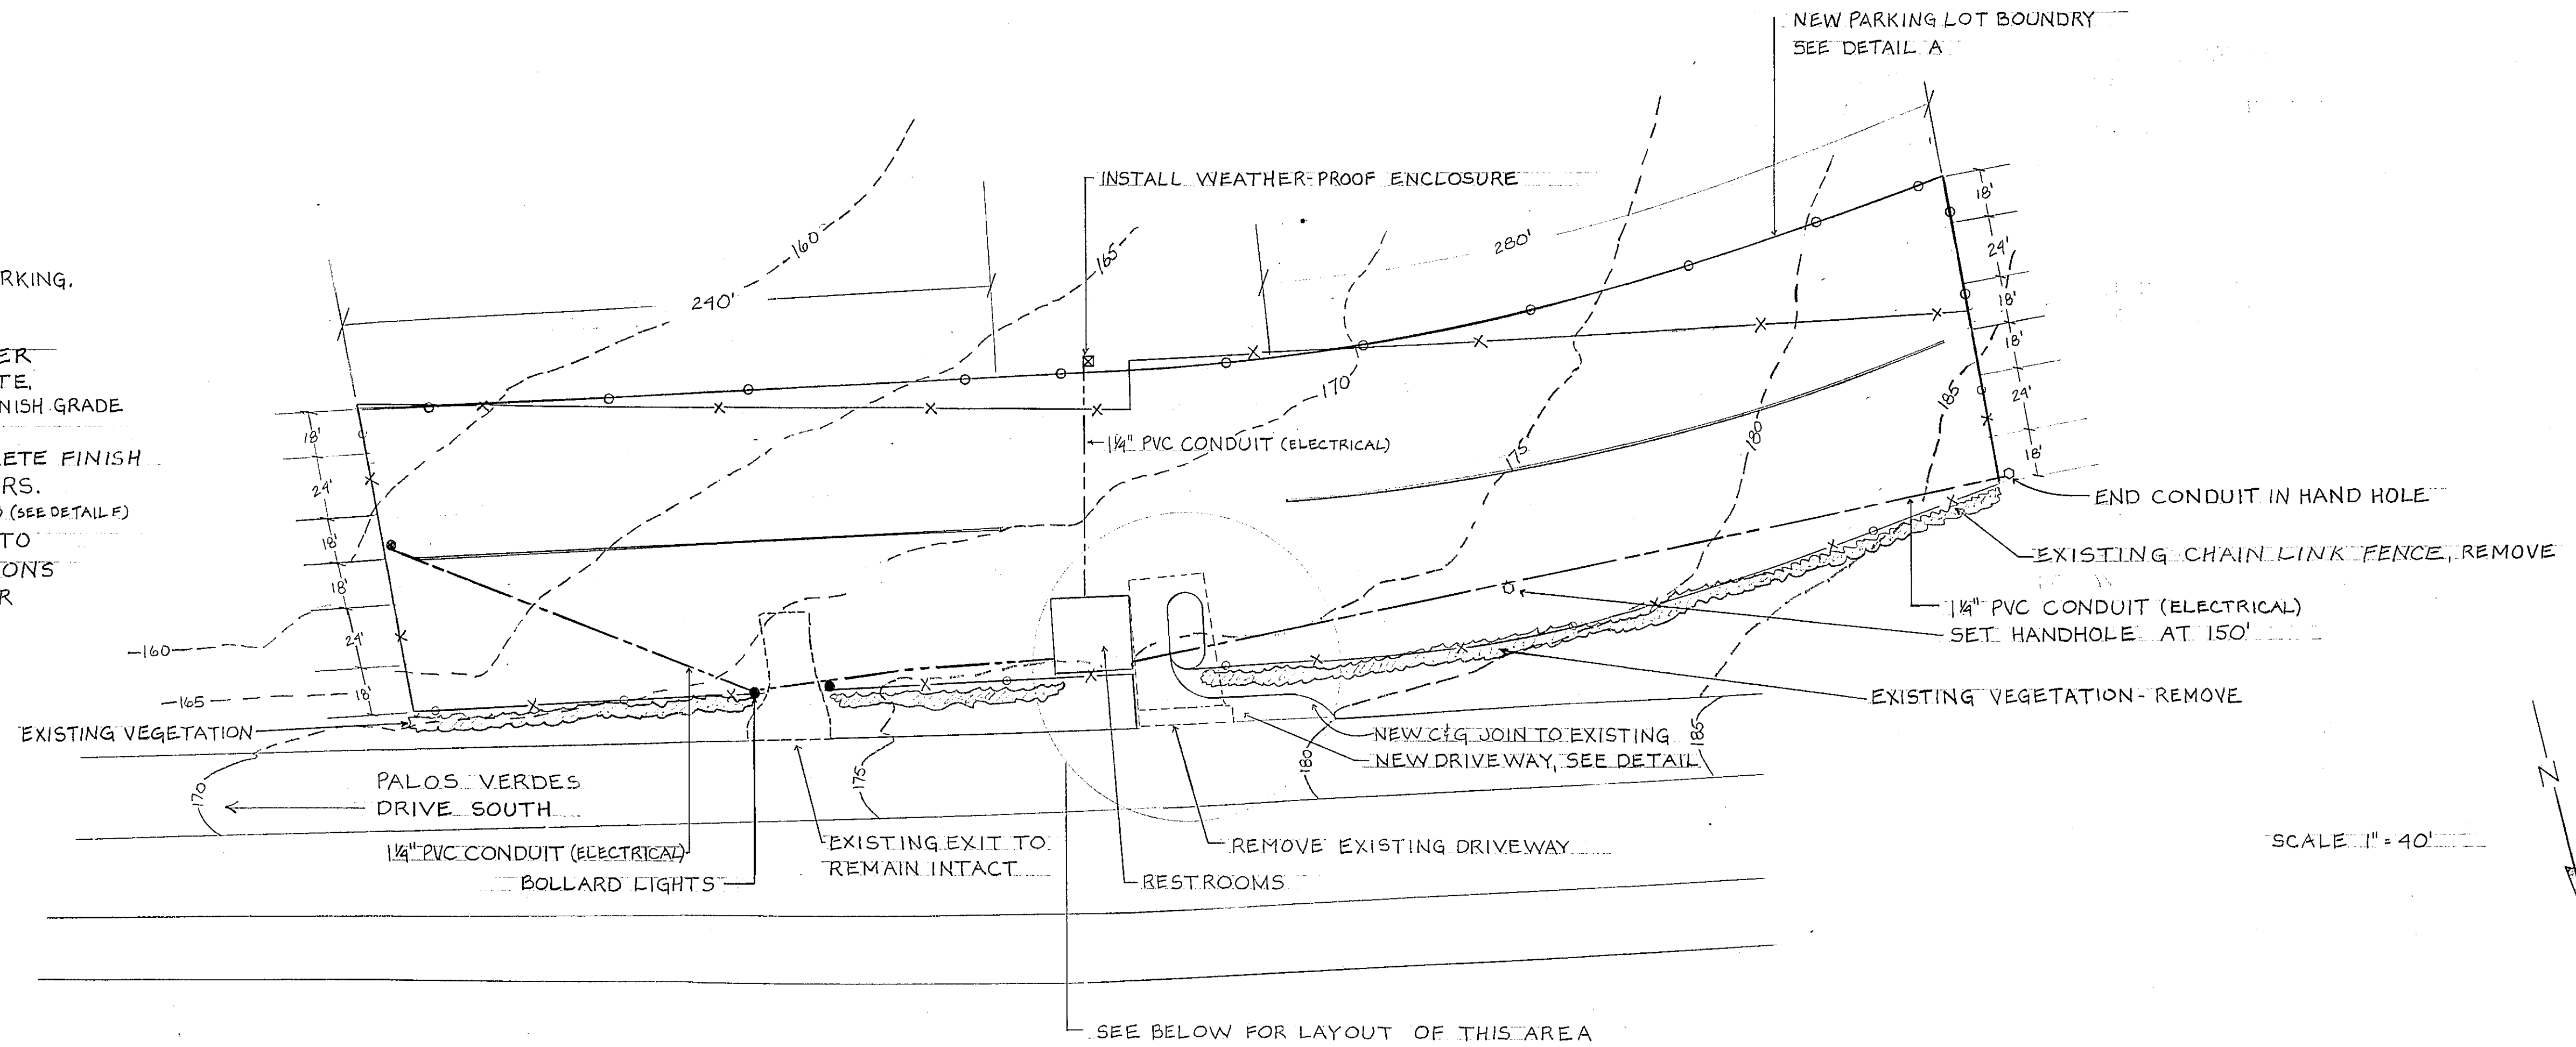

GENERAL NOTES:

1. CONSTRUCT COLLECTOR LANE WITH 4" A.C. ON 6" C&G.
2. JOIN NEW CURB & GUTTER TO EXISTING.
3. GRINDER PUMP ASSEMBLY, MODEL GP 214, SERIES 4; FROM ENVIRONMENT ONE CORP., SCENECTADY, NY, OR APPROVED EQUAL. INSTALLED PER MAN. SPEC'S.
4. PLACE TANK VENT WITHIN 4' OF TANK ATTACH TO PARKING BOLLARD.
5. INLET TO TANK - SEE MAN. SPEC'S.
6. FEBCO B25Y REDUCED PRESSURE ASSEMBLY. SIZED PER LA. CO. SAN DIST SPECS.
7. GATE VALVE INSTALLED IN VALVE BOX; TIE INTO LINE A, FORCED MAIN PER LA. CO. SAN. DIST. SPECS.
8. GATE VALVE INSTALLED IN VALVE BOX; TIE INTO LINE B, FORCED MAIN PER LA. CO. SAN. DIST. SPECS.
9. HANDICAPPED ACCESS RAMP; FIELD VERIFY EXACT LOCATION.

