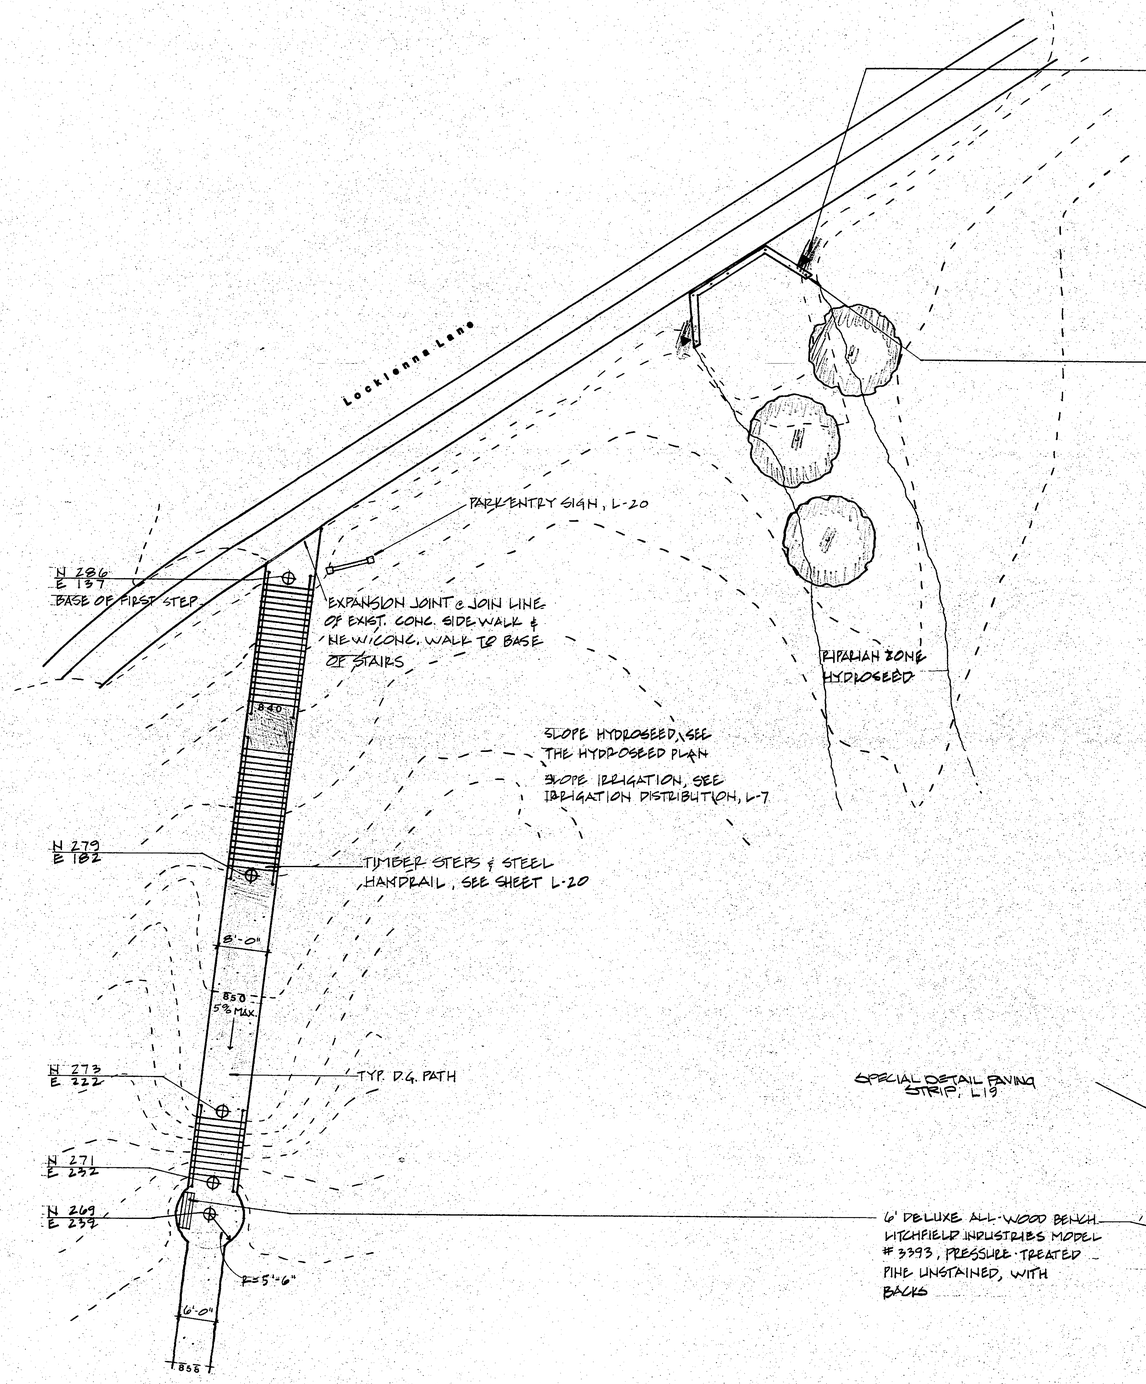

ENTRY STAIRWAY

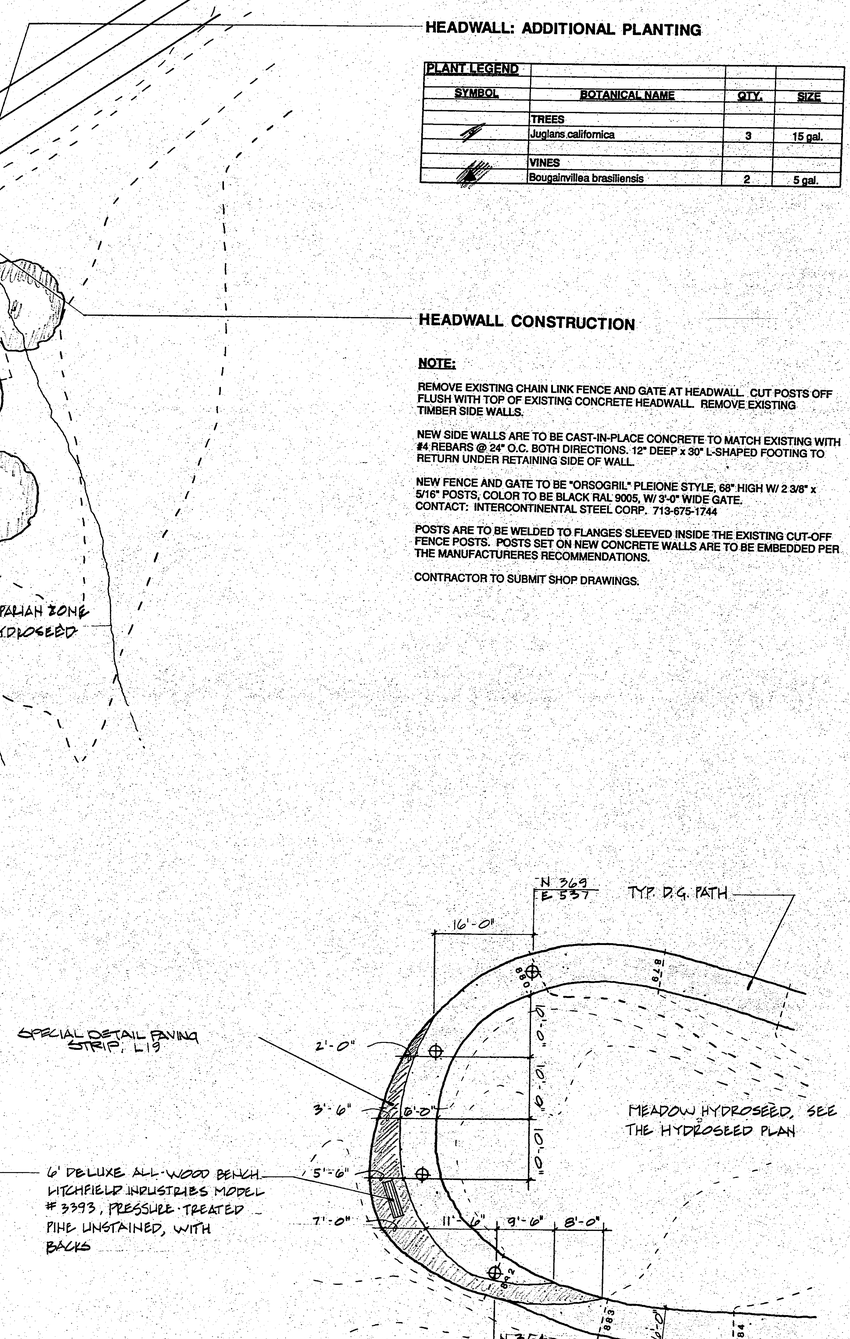

PLANT LEGEND			
SYMBOL	BOTANICAL NAME	QTY.	SIZE
	TREES		
	Juglans californica	3	15 gal.
	VINES		
	Bougainvillea brasiliensis	2	5 gal.

NOTE:

REMOVE EXISTING CHAIN LINK FENCE AND GATE AT HEADWALL. CUT POSTS OFF FLUSH WITH TOP OF EXISTING CONCRETE HEADWALL. REMOVE EXISTING TIMBER SIDE WALLS.

NEW SIDE WALLS ARE TO BE CAST-IN-PLACE CONCRETE TO MATCH EXISTING WITH #4 REBARS @ 24" O.C. BOTH DIRECTIONS. 12" DEEP x 30" L-SHAPED FOOTING TO RETURN UNDER RETAINING SIDE OF WALL.

NEW FENCE AND GATE TO BE "ORSOGRIL" PLEIONE STYLE, 68" HIGH W/ 2 3/8" x 5/16" POSTS, COLOR TO BE BLACK RAL 9005, W/ 3'-0" WIDE GATE.
CONTACT: INTERCONTINENTAL STEEL CORP. 713-675-1744

POSTS ARE TO BE WELDED TO FLANGES SLEEVED INSIDE THE EXISTING CUT-OFF FENCE POSTS. POSTS SET ON NEW CONCRETE WALLS ARE TO BE EMBEDDED PER THE MANUFACTURERES RECOMMENDATIONS.

CONTRACTOR TO SUBMIT SHOP DRAWINGS.

HEADWALL

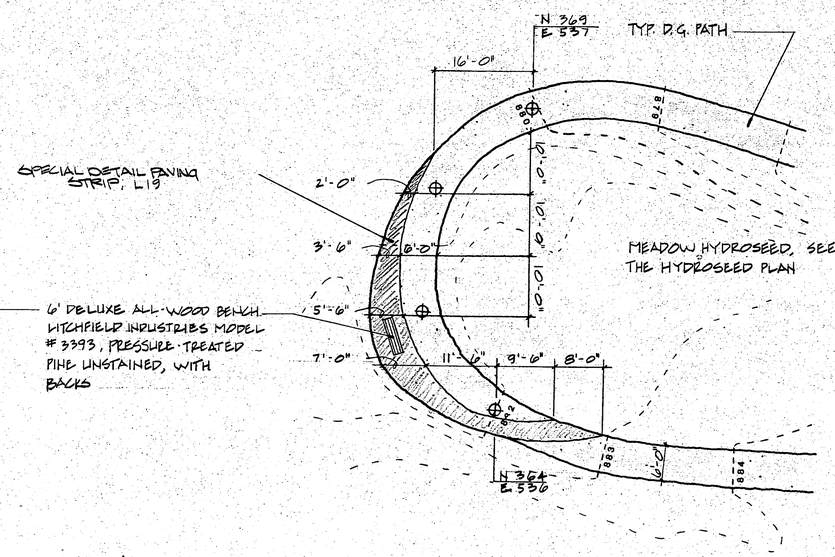

MEADOW BENCH

LAND IMAGES
LANDSCAPE ARCHITECTURE
14025 PANAY WAY
MARINA DEL REY
CALIFORNIA 90292
(310) 822-0043

PROJECT

LOWER HESSE PARK

City of Rancho Palos Verdes

SHEET DESCRIPTION

AREA PLANS

REVISION DESCRIPTION

1	
2	
3	
4	
5	

REGISTERED LANDSCAPE ARCHITECT
THOMAS A. LOCKEY
No. 1551
Signature
Date
STATE OF CALIFORNIA

JOB NO.	7030
DATE	JUNE 1, 1998
SCALE	1" = 10'

SHEET L-17 OF L-20

NORTH