



PLAN CHECK SUBMITAL 9-28-98  
 PLAN CHECK COMMENTS 1-15-99  
 2001 CBC UPDATE 11-18-03

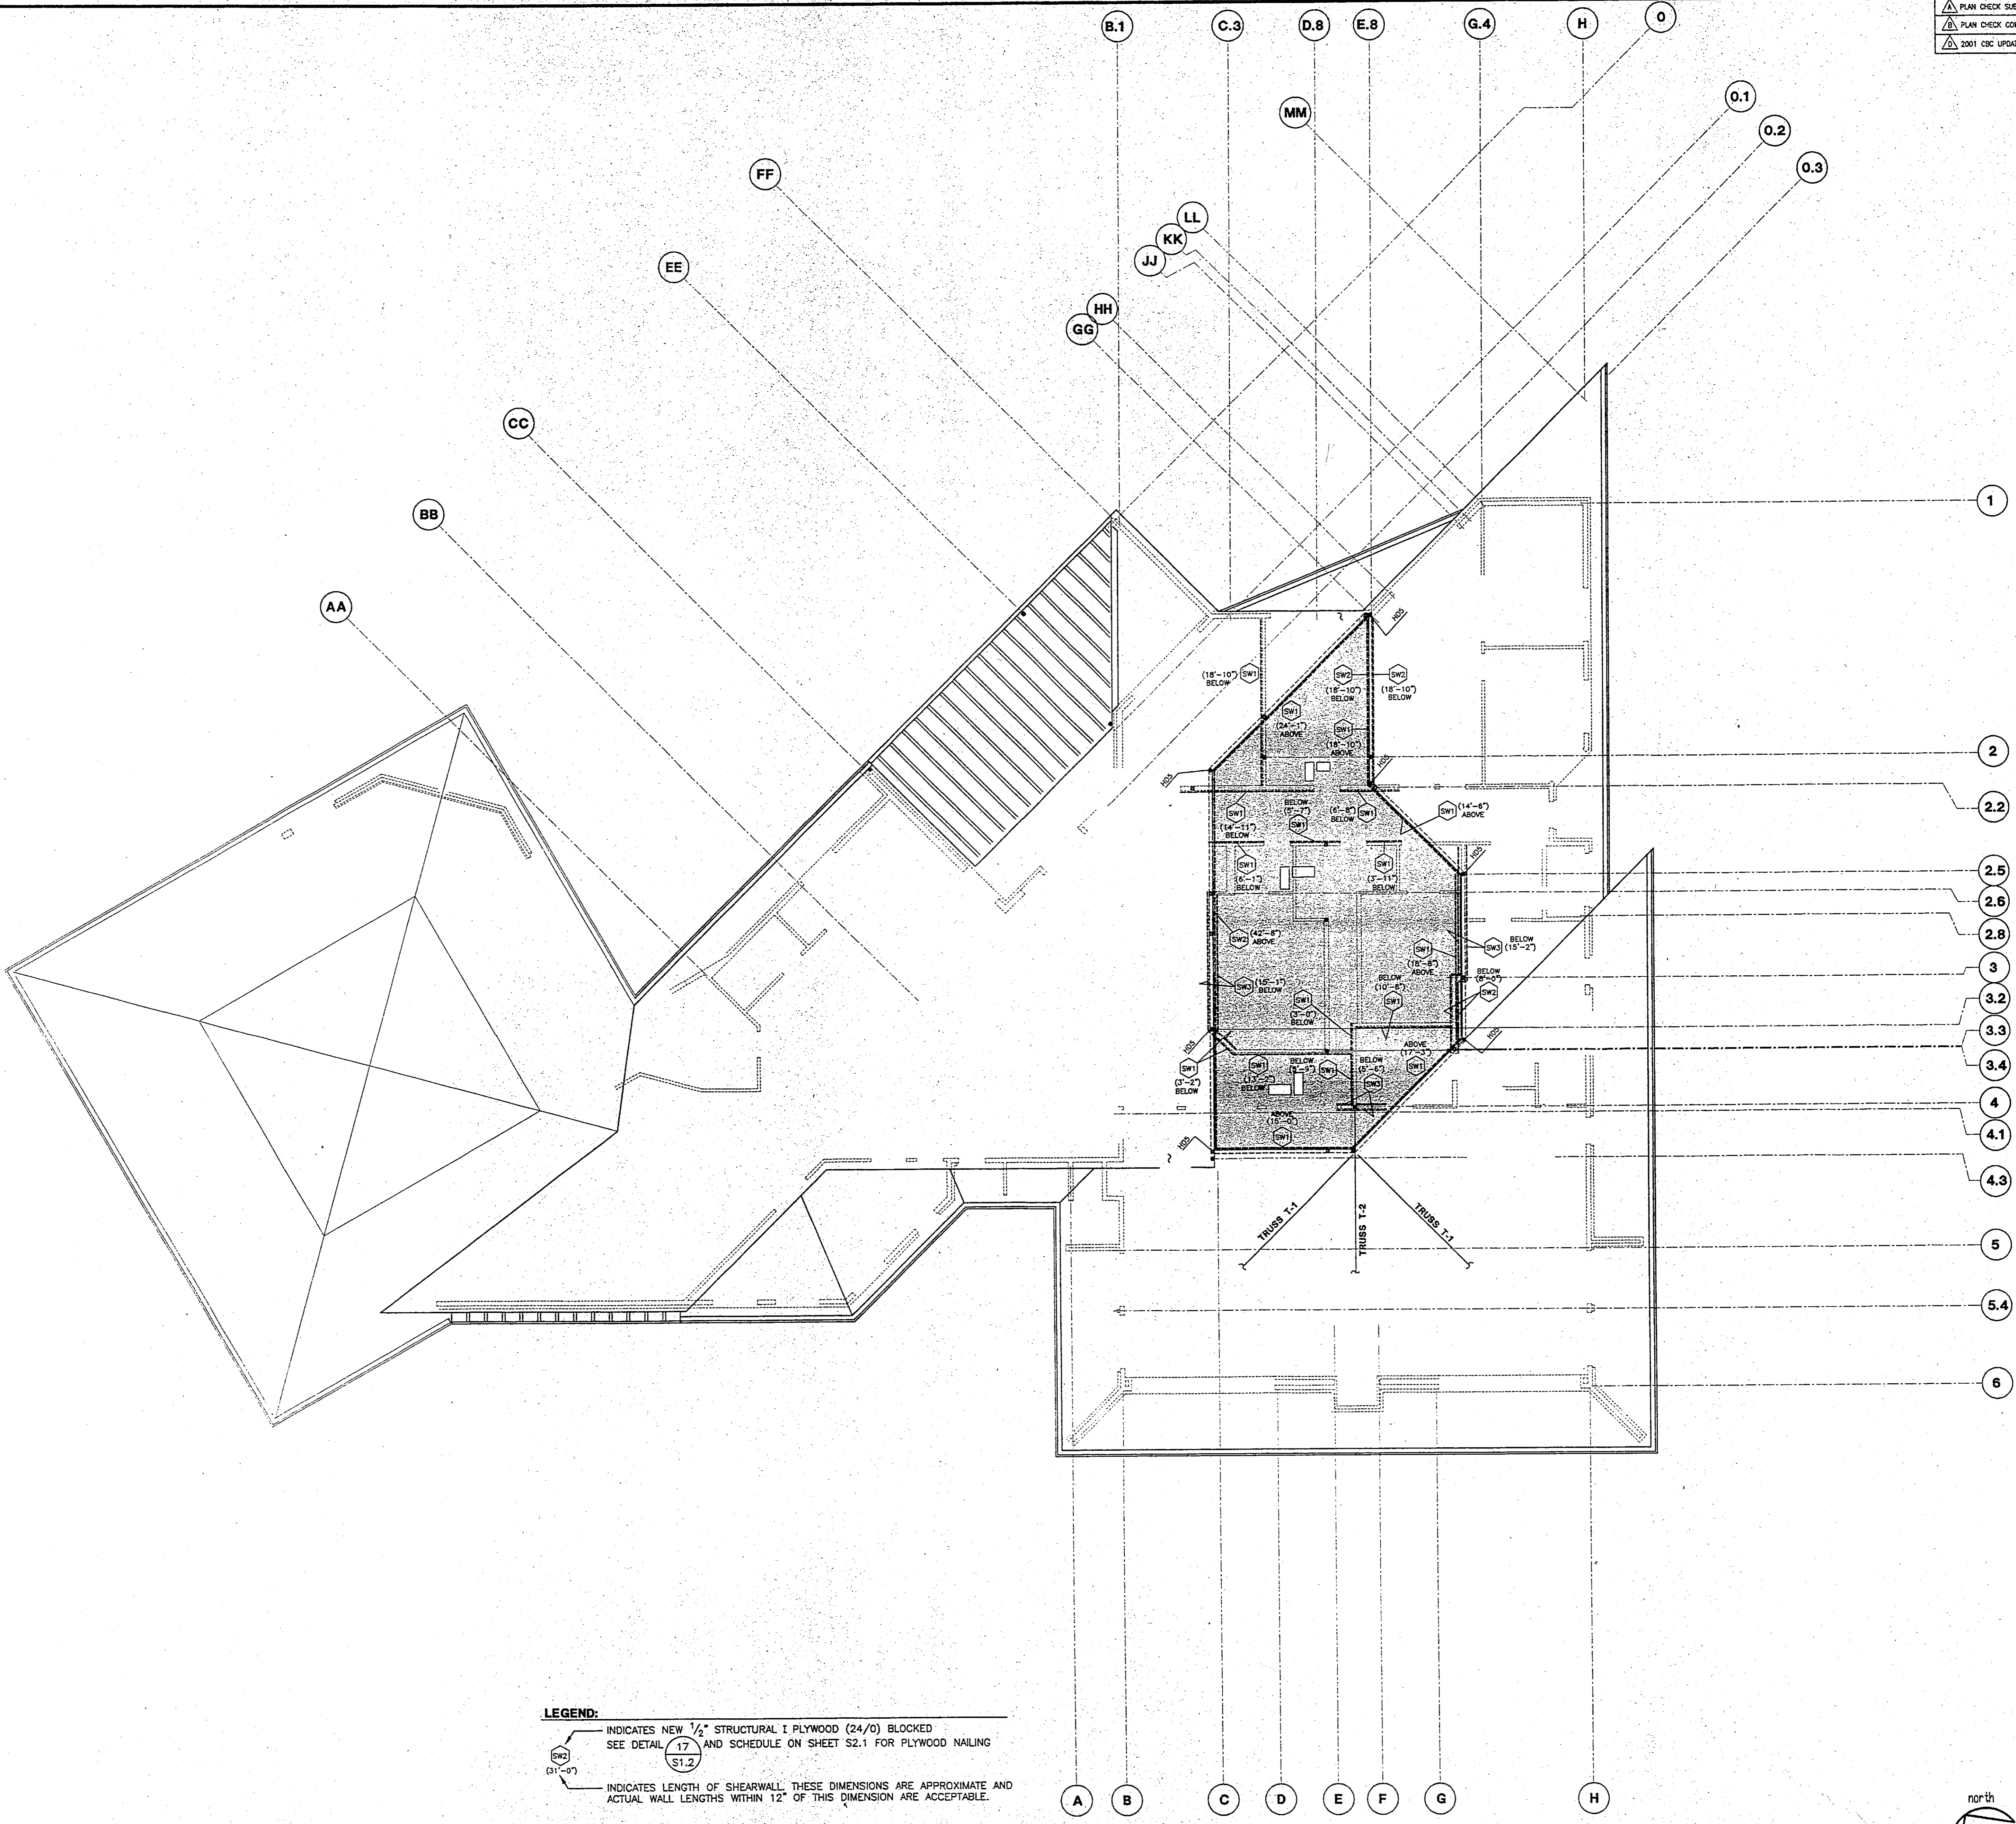


**LEGEND:**  
 INDICATES NEW 1/2" STRUCTURAL I PLYWOOD (24/0) BLOCKED  
 SEE DETAIL 17 AND SCHEDULE ON SHEET S2.1 FOR PLYWOOD NAILING  
 INDICATES LENGTH OF SHEARWALL. THESE DIMENSIONS ARE APPROXIMATE AND  
 ACTUAL WALL LENGTHS WITHIN 12" OF THIS DIMENSION ARE ACCEPTABLE.

**SHEARWALL PLAN AT MECHANICAL WELL**

SCALE: 1/8"=1'-0"

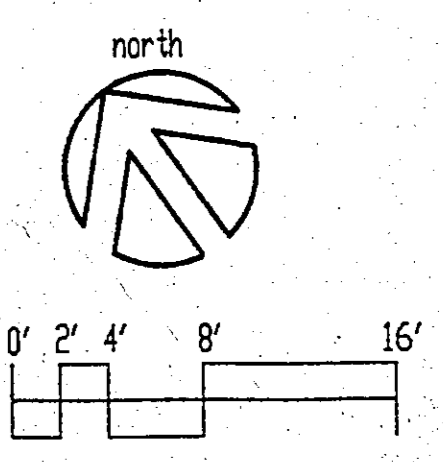

**RON YEO, FAIA ARCHITECT, INC.**  
 500 JASMINE AVENUE, CORONA DEL MAR  
 CALIFORNIA 92625 P-949-644-8111 F-949-644-0449  
 PATRICK MARR, AIA, P.E. ASSOCIATE ARCHITECT

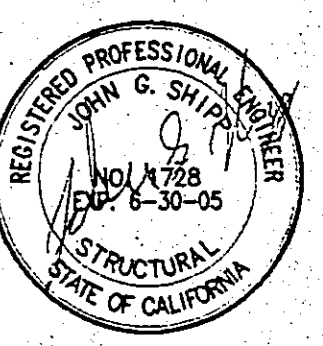

**ABS Consulting**  
 ECE Structural Engineers Division  
 300 California Drive, Suite 300  
 Irvine, Calif. 92602-8900 USA  
 Phone (714) 794-4242  
 Fax (714) 794-4272

**POINT VICENTE INTERPRETIVE  
 CENTER EXPANSION**  
 31100 Point Vicente Drive West  
 Rancho Palos Verdes, CA

**SHEARWALL PLAN  
 AT  
 MECH. WELL**

THESE DRAWINGS DO NOT CONTAIN THE NECESSARY COMPONENTS FOR CONSTRUCTION SAFETY

DRAWN	SM
CHECKED	SM
DATE	
SCALE	AS NOTED
JOB. NO.	250534.01
SHEET	

**S2.5**

44 OF 69 SHEETS

common law copyright for these plans. These drawings are the property of Ron Yeo, Architect, Inc. and shall remain the property of Ron Yeo, Architect, Inc. in all forms and manners, nor are they to be copied, reproduced, or otherwise used without the written permission and consent of Ron Yeo, Architect, Inc.